



MASTER ROLL 150 VERTICAL REWINDER WITH TOUCH SCREEN DISPLAY

Sturdy and compact vertical reworker
designed to produce short length rolls.


- > Vertical reworker designed to reduce large master rolls into shorter length rolls. You can rewind few meters of material in a very fast and simple way
- > Quick load and unload of the rolls without having to set the locks
- > Easy to use: the roll is simply fitted into the support and it locks after the first rotation
- > Digital display to set the required length: the film is automatically rewound and stops when the length is reached
- > Equipped with potentiometer: according to the kind of material and its dimension, it is possible to adjust the speed to ensure the best performance

SUITABLE FOR:


- ☒ Vinyl films (sign vinyl)
- ☒ Colored films
- ☒ Reflective materials
- ☒ Protective films with liner
- ☒ Paper
- ☒ Wallpaper
- ☒ PVC banner
- ☒ Many more...

NEW Operator friendly intuitive set up of parameters thanks to new software design (LCD touch screen display)



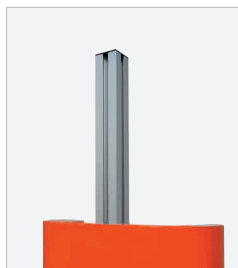

Aluminium profile with guide for straight cross-cut of rolls produced from the master roll



New software design for better usability

NEW



Touch screen display to select the rewinding parameters

Setting of:

- rewinding length
- rewinding speed
- slowdown & stop adjustments
- unit of measurement (metric or imperial)



Encoder to accurately measure the rewound length of the material



Roll tension adjustment



Made from powder coated sheet steel and anodized aluminium sections



Automatic lock of the rolls on the rotating shaft using Esablock, suitable for 50 mm (2") and 76 mm (3") core

Maximum master roll dimensions	Height 1500 mm (60 in), Ø 240 mm (9 in) Roll 76 mm (3") and 51 mm (2")
Maximum roll weight	50 kg (110 lb)
Rewinding speed with electronic adjustment	From 0 to 23 m/min
Supply	230 V - 50 Hz - 500 W
Dimensions (L x D x H)	920 x 400 x 1800 mm (36 x 16 x 71 in)
Weight	70 kg (154 lb)
Packing dimensions (L x D x H)	1600 x 600 x 1200 mm (64 x 23 x 47 in)
Packing weight	110 kg (242 lb)


Manufactured in compliance
with CE regulations



Follow us:



Distributor



100 % Made by FLEXA



100 % Made in Italy

